

NH-ALSF TRACT NO. 11-08
Big Arbor Vitae

Vilas County

Town 40 North, Range 7 East

Section 21 – Govt. Lot 2

Section 28 – Govt. Lot 1, SWNW, N½NE, SWNE, NENW

Section 29 – Govt. Lots 1, 2, 3

10% of the total sale bid value will be required as bid bond.

15% of the total sale bid value will be required for performance bond.

The cutting area is approximately 191 acres.

The contract period is 2 years.

All trees that will yield one or more 100-inch sticks to the minimum top diameter chosen by the bidder will be cut and utilized.

ESTIMATED VOLUME (CORDS)

MINIMUM TOP DIAMETER

<u>SPECIES</u>	<u>4"</u>	<u>Whole Tree</u>	<u>Advertised Price Per Unit</u>
Mixed Hardwood ¹	1015	1430	\$ 16.20
Aspen	525	700	\$ 19.80
Balsam Fir	150	320	\$ 6.40
Red Oak	80	100	\$ 11.20

ESTIMATED VOLUME (MBF)

Basswood	27	\$ 80.00
Red Oak	23	\$ 187.00
Mixed Hardwood ²	14	\$ 153.00


¹Mixed Hardwood pulp approximately 32% red maple, 23% hard maple, 34% white birch, and 11%basswood.

²Mixed Hardwood logs approximately 50% red maple, 36% hard Maple, and 14% yellow birch.

Special Conditions:

1. Cutting must be concurrent for all species to be harvested.
2. Slash within 50' of recreational trails, Town, and county roads must be lopped and/or scattered to lie within two feet of the ground and pulled back at least ten feet behind the tree line concurrently with cutting.
3. Decking will be permitted along the snowmobile trails only when the trail is not in use. Wood decked on the snowmobile trails must be removed before the start of each snowmobile season. All trails must be repaired to pre-harvest conditions before the start of each snow season.
4. Landing sites and new haul roads need to be approved by the administering forester during the pre sale meeting with the logging contractor or as need arises.
5. Tops and slash which fall over blue lines or in lowland swamp areas must be pulled out or back concurrently with cutting.
6. Yellow circle area lies east of the snowmobile trail and must be harvested between August 1st and November 15th for scarification purposes.

**WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
TIMBER SALE
TRACT 11-08 Big Arbor Vitae
T40N R7E SECTION 21, 28, 29
HARVEST ACRES - 191**

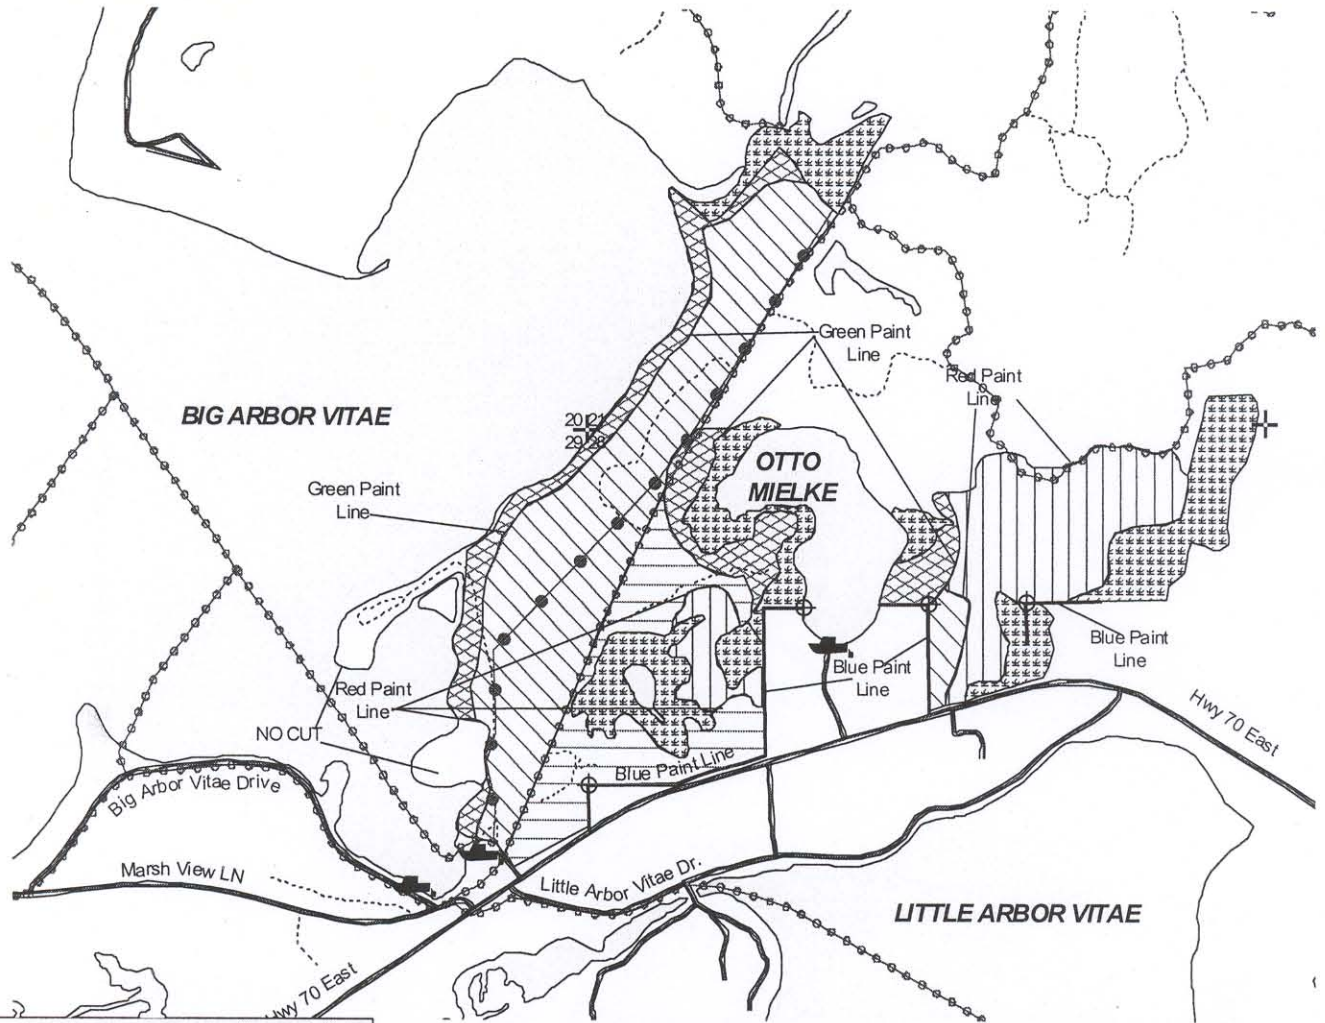

Legend

- Woods Roads
- Iron pipes
- Boat Landing
- Lowland Swamp
- No Activity
- Powerline
- Highways & Town Roads
- Bluelines
- Redlines
- Greenlines
- Snowmobile Trail
- Lakes

- Selection Thinning (80 Acres) Cut all aspen, white birch, merchantable balsam fir, and orange marked trees. Harvest during frozen ground conditions only.
- Aspen Regeneration Area (46 Acres): Cut all aspen, white birch, red and sugar maple, basswood, and balsam fir. Cut all 1-5" trees. DO NOT cut any hemlock, oak, yellow birch, or cedar.
- Yellow Circle Area (33 Acres) Cut all aspen, white birch, merchantable balsam fir, and orange marked trees. Cut all trees within yellow paint lines down to 2" including trees marked yellow. Seasonal Restriction: Cutting permitted only between Aug 1 - Nov 15
- Aesthetic Area (32 Acres): Cut only trees marked with orange paint. Harvest only during frozen ground conditions.

Note: Do NOT cut trees marked with green paint.

N
Scale: 4" = 1 Mile
1:15,840

Map produced by
Robert Heuser 3/03