

NH-ALSF TRACT NO. 8-16

Fox Road

Oneida County

Town 38 North, Range 7 East

Section 35 – NESE, SWSE, SESE

15% of the total sale bid value or \$1,000.00, whichever is greater, will be required for performance bond.

The cutting area is approximately 59 acres.

The contract period is 3 years.

All trees that will yield one or more 100-inch sticks to the minimum 4” top diameter will be cut and utilized.

Whole tree utilization is not allowed.

ESTIMATED VOLUME (TONS)
MINIMUM TOP DIAMETER

<u>SPECIES</u>	<u>4”</u>	<u>Whole Tree</u>	<u>Advertised Price</u> <u>Per Unit</u>
Red Pine ¹	550		\$ 21.90
Aspen	1500		\$ 12.10
Mixed Hardwood ²	870		\$ 12.80
Total Minimum Bid Value			\$ 41,331.00

¹Approximately 74% Red Pine 14% Spruce, 7% Jack Pine, 2% Balsam Fir, 2% Tamarack and 1% White Pine. Included within this volume is approximately 20 MBF of Red Pine. Weight conversion is 2.20 tons/cord.


²Approximately 54% Oak, 43% Maple and 3% White Birch. Included within this volume is approximately 10 MBF of Oak. Weight conversion is 2.54 tons/cord.

Total sale volume equates to 20.20 cords/acre or 49.50 tons/acre.

Special Conditions

1. Cutting must be concurrent for all species to be harvested.
2. All snowmobile trails utilized for access and hauling must be repaired to pre-harvest conditions before the start of each snow season.
3. All pine products cut between May 1 and September 1 must be removed from the sale area within three weeks from time of cutting. Pine products cut during the remainder of the year must be removed prior to May 1 of each year.
4. The SWAMP CONIFER area may only be worked in under frozen ground conditions.
5. Slash within 100’ of town roads must be lopped to lie within 24” of the ground concurrently with harvest and pulled back 10” from the tree line.
6. If the contract is to be worked on during multiple time periods a mid-contract “pull-off” inspection meeting will be required. One-week notice shall be given by the contractor prior to moving equipment off-site. During the “pull-off” inspections provisions needing attention will be documented. The contractor at this time can decide to remedy them before pulling off or rectify them when moving back onto the site. If the latter is chosen, documented items shall be addressed before harvesting can continue.

**WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
TIMBER SALE
TRACT 8-16 FOX ROAD
T38N-R7E, Section 35
HARVEST ACRES: 59**

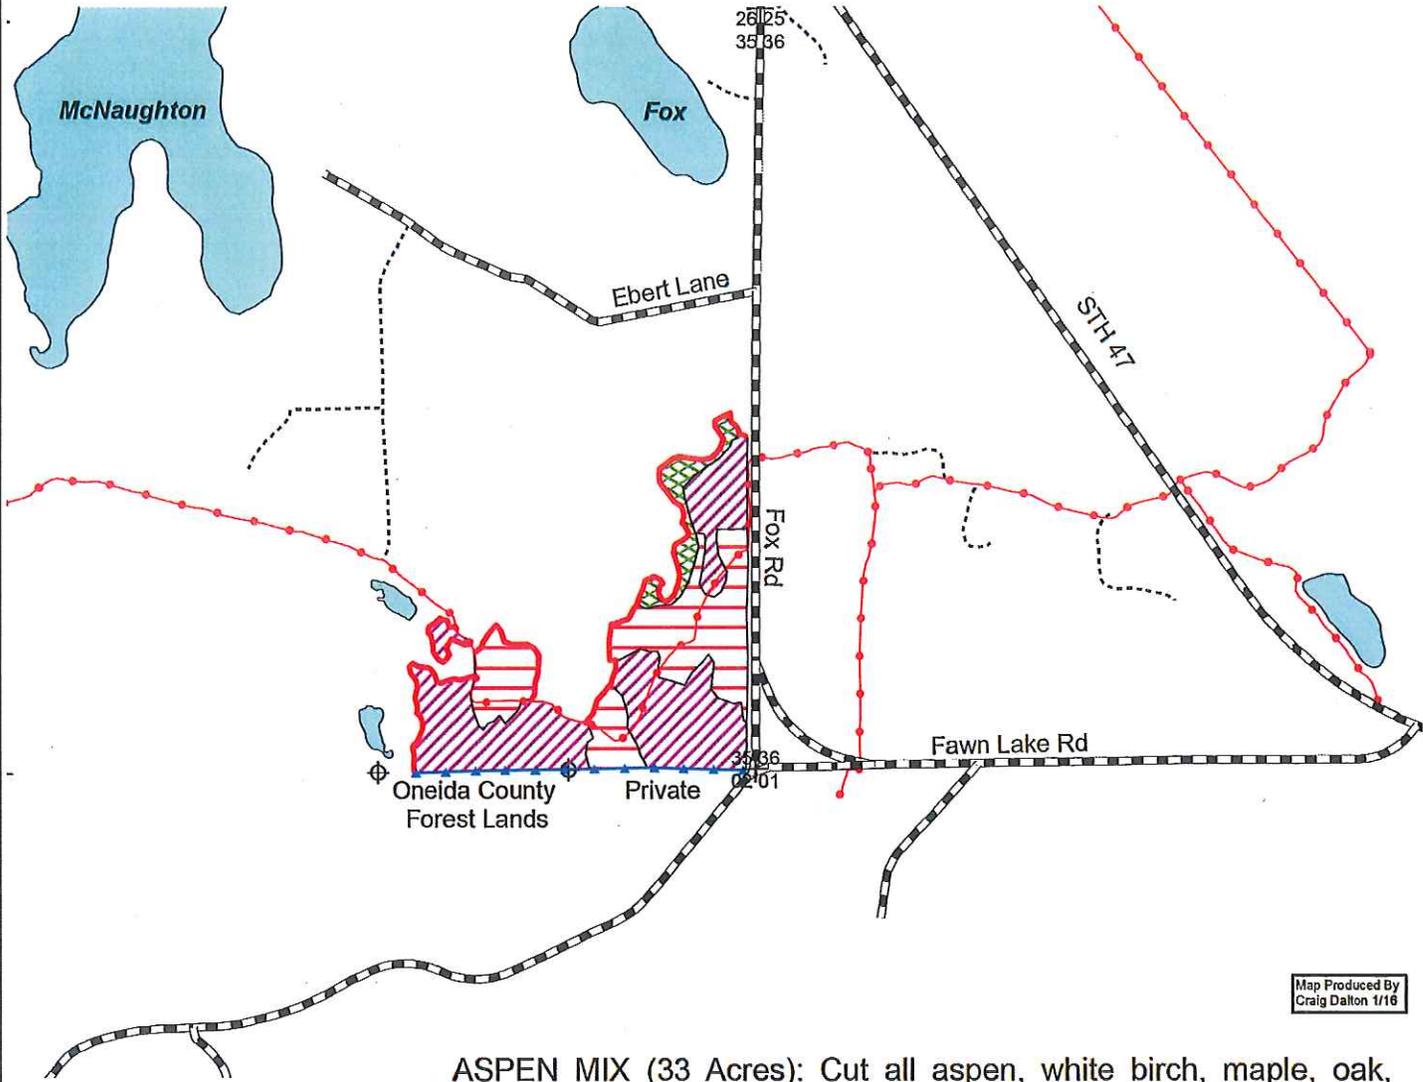

Map Produced By
Craig Dalton 1/16



Scale: 4" = 1 Mile
1:15,840

Legend

-  Survey Marker
-  Section Corner
-  Woods Roads
-  Highways and Town Roads
-  Snowmobile Trails
-  Blue Paint Line
-  Red Paint Line
-  Lakes

-  **ASPEN MIX (33 Acres):** Cut all aspen, white birch, maple, oak, spruce, tamarack, balsam fir, and jack pine not marked with green paint. Cut only those red pine and white pine marked with orange. All 1-5" aspen and red maple shall be cut concurrently with harvest.
-  **RED PINE MIX (22 Acres):** Cut all aspen, white birch, maple, oak, spruce, tamarack, balsam fir and jack pine not marked with green paint. Cut only those red pine and white pine marked with orange.
-  **SWAMP CONIFER (4 Acres):** Cut same as RED PINE MIX.

The entire sale area lies within Management Area 6 -- Oneida Sandy Plains -- Forest Production

This map is not a survey of the actual boundary of any property line this map depicts

