

NH-ALSF TRACT NO. 12-16

Vandercook Pines

Vilas County

Town 41 North, Range 7 East

Section 30 GL 1, SWSW

Section 31 NWNW, GL 2, SW¼

Section 36 GL 1

15% of the total sale bid value or \$1000.00, whichever is greater, will be required for performance bond.

The cutting area is approximately 64 acres.

The contract period is 3 years.

All trees that will yield one or more 100-inch sticks to the minimum 4" top diameter will be cut and utilized.

Whole tree utilization is not allowed.

ESTIMATED VOLUME (TONS)
MINIMUM TOP DIAMETER

<u>SPECIES</u>	<u>4"</u>	<u>Whole Tree</u>	<u>Advertised Price</u> <u>Per Unit</u>
White Pine ¹	550		\$ 20.00
Balsam Fir ²	290		\$ 6.10
Aspen	1150		\$ 12.00
Mixed Hardwood ³	775		\$ 13.00
Total Minimum Bid Value			\$ 36,644.00

¹White Pine-Approximately 72% (396 tons) White Pine, 28% (154 tons) Red Pine. Included in this volume is approximately 54 MBF of White Pine and 17 MBF of Red Pine saw-log size material.

²Balsam Fir- Approximately 91% (264 tons) Balsam Fir, and 9% (26 tons) Spruce. Included in this volume is approximately 2 MBF of White Spruce saw-log material.


³MX -Approximately 34% (266 tons) Soft Maple, 25% (196 tons) White Birch, 21% (159 tons) Hard Maple, 19% (149 tons) Red Oak, and 1% (5 tons) Ironwood.

Special Conditions

1. All pine products cut between May 1 and September 1 must be removed from the sale area within three weeks from time of cutting. Pine products cut during the remainder of the year must be removed prior to May 1 of each year.
2. Biomass Harvesting is not allowed due to operational difficulties. Do not cut, knock down, or utilize dead trees unless the tree poses a safety hazard during harvesting operations.
3. Snowmobile trails must be kept free of debris, snow covered in winter, and left in good condition for vehicle traffic at all times. All trails must be repaired to pre-harvest conditions before the start of each new season. All landings and any new roads must be approved prior to sale start up.
4. Decking of wood will not be permitted along Town Roads.
5. Operation of all equipment is prohibited 15 feet from lakeshores edge and wetland areas.
6. All slash must be lopped and or scattered to within two feet of the ground. Trees felled into open wetland or keg areas must be pulled back into the sale area before being limbed and topped.
7. Slash within 50 feet of Vandercook Road and pulled back at least ten feet from tree line concurrent with cutting.
8. Cutting must be concurrent for all species to be harvested.
9. Equipment Restrictions: Skidding of forest product materials will be restricted to shortwood skidders only.
10. Felling and skidding damage to residual trees must be avoided.



**WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
TIMBER SALE
TRACT 12-16 VANDERCOOK PINES
T41N R7E SECTIONS 30, 31, 36
HARVEST ACRES - 64**

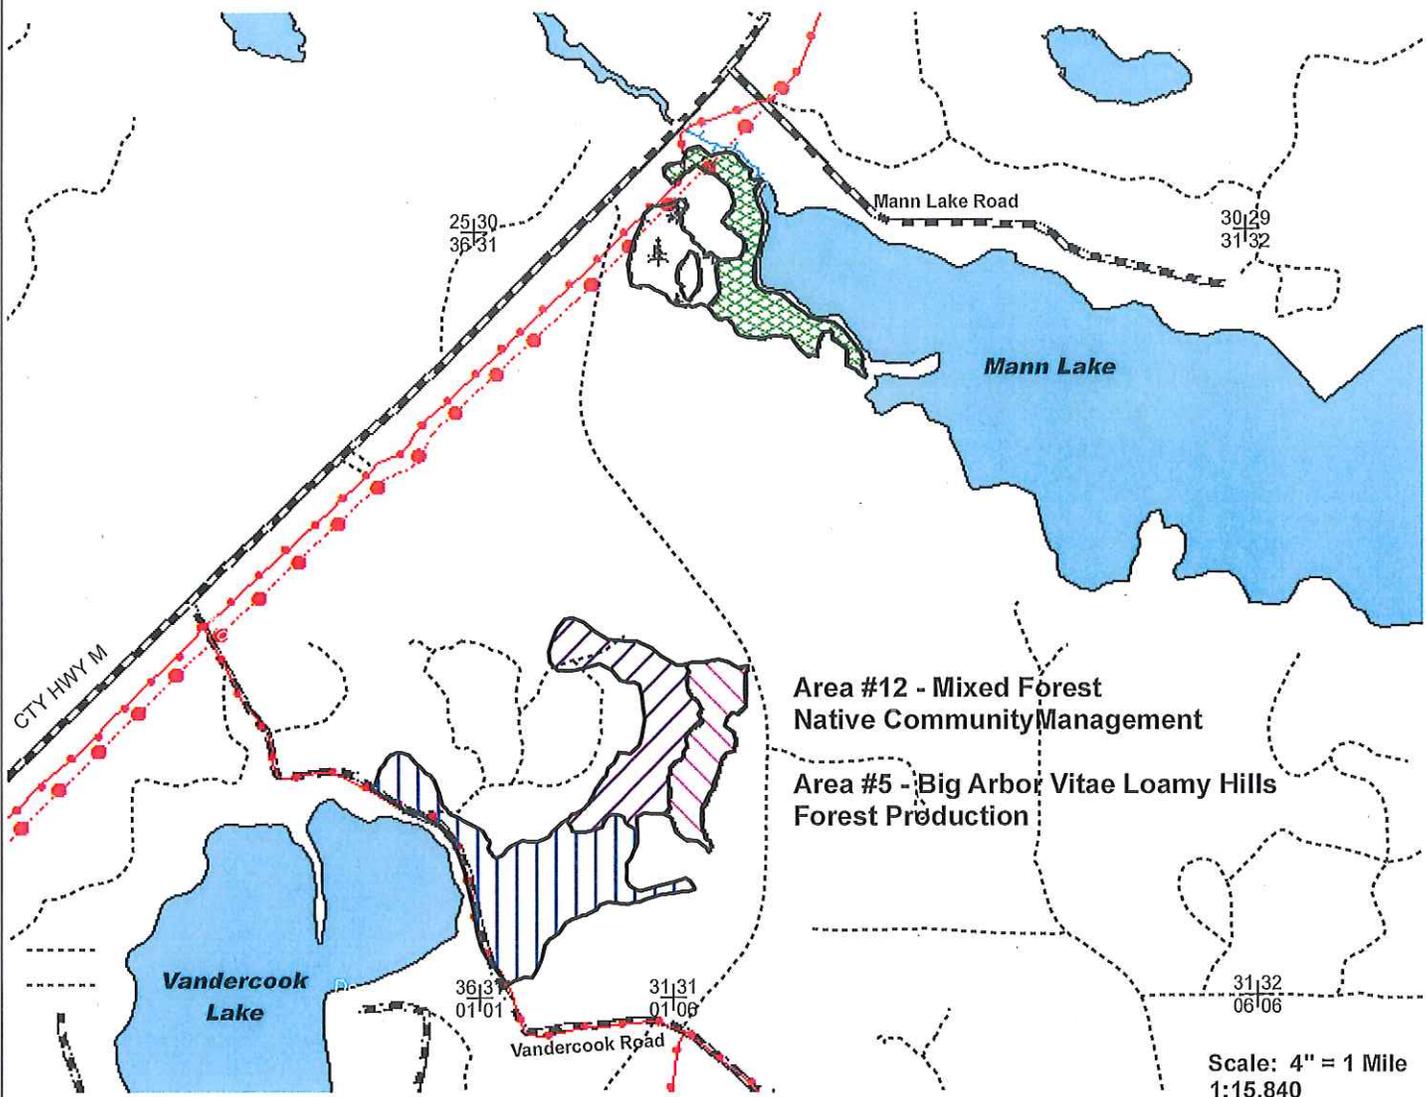

**Area #12 - Mixed Forest
Native Community Management**

**Area #5 - Big Arbor Vitae Loamy Hills
Forest Production**

Scale: 4" = 1 Mile
1:15,840

Legend

- Section Corner
- Survey Marker
- Keg/Swamp
- Red Line
- Powerline
- Snowmobile Trails
- Highways and Town Roads
- Woods Roads
- Rivers and Streams
- Lakes & Open Water

- Pine Thinning Area (6 Acres): Cut all aspen, white birch, black spruce, balsam fir and orange marked trees.
- Pine/Oak/Aspen Harvest Area (11 Acres): Cut same as above.
- Pine Regeneration Area (15 Acres): Cut all aspen, white birch, maple, oak, ironwood and orange trees. Cut all 1-5 inch trees.
- Aspen Reneneration Area (8 Acres): Cut all aspen, white birch, maple, black spruce, balsam fir and orange marked trees. Cut all 1-5 inch stems EXCEPT pine, oak and white spruce.
- Pine/Aspen Harvest Area (24 Acres): Cut all aspen, birch, maple, ironwood, balsam fir and orange marked trees.

Note: Do NOT cut trees marked with green paint.

