


**WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
TIMBER SALE
TRACT 15-24 COUNTY O BRIDGE
T39N R8E SECTIONS 1, 11, 12 & 13
HARVEST ACRES - 119**

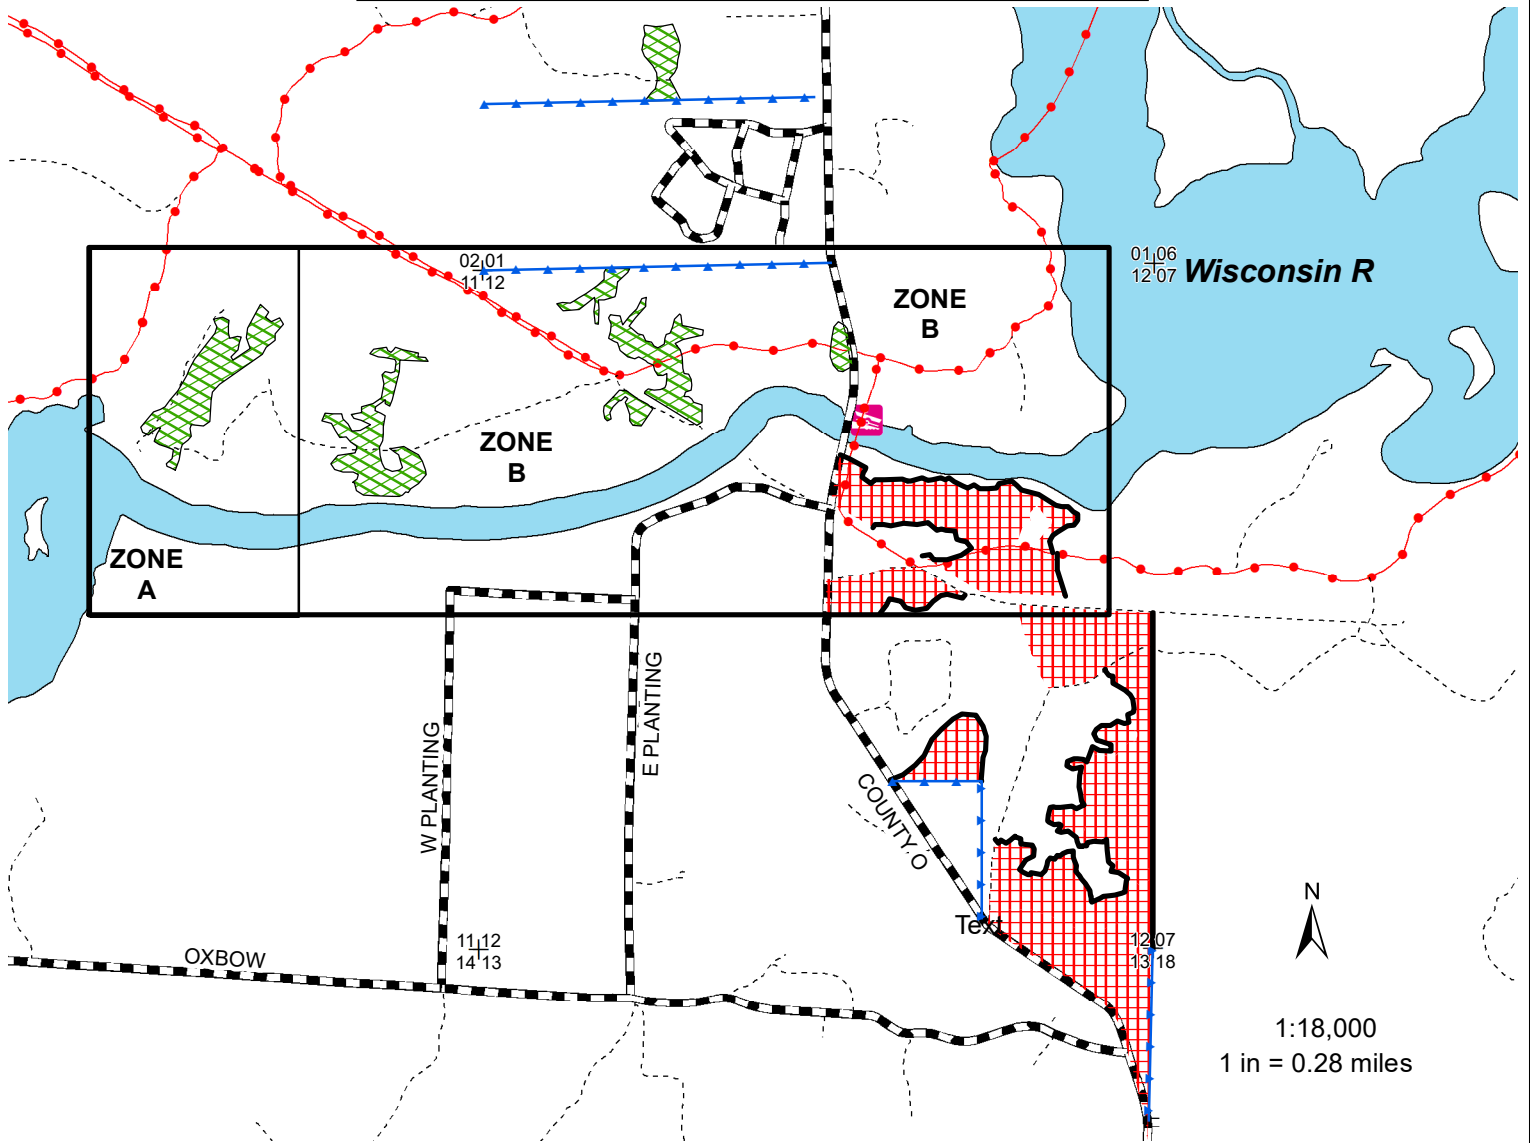

N
1:18,000
1 in = 0.28 miles

Legend

- + Section Corner
- Boat Landing
- Town and County Roads
- Snowmobile Trails
- Woods Roads
- Red Line
- Blue Line
- Lakes

- Mixed Pine Area (90 Acres): Cut merchantable aspen, fir, red maple, jack pine, and orange marked trees.
- Pine Plantations (29 Acres): Cut all orange marked trees.

ZONE A Harvesting in this zone is allowed between November 1st and January 15th.

ZONE B Harvesting in this zone is allowed between November 1st and March 15th.

All pine products cut between April 1 and September 1 must be removed from the sale area within three weeks from time of cutting. Pine products cut during the remainder of the year must be removed prior to April 1 of each year.

The entire sale area lies within Management Area 6: Oneida Sandy Plains - Forest Production
This map is not a survey of the actual boundary of any property this map depicts

NH-ALSF TRACT NO. 15-24
County O Bridge

The cutting area is approximately 119 acres.

All trees that will yield one or more 100-inch sticks to a 4" top diameter will be cut and utilized.

ESTIMATED VOLUME (TONS)
MINIMUM TOP DIAMETER

<u>SPECIES</u>	<u>4"</u>
Red Pine ¹	1800
Aspen ²	1350

Total Minimum Bid Value:\$50,400.00

Red Pine¹ = Volume includes approximately 50% red pine, 25% jack pine, 20% white pine, 5% balsam fir
Volumes includes approx. 40 MBF PR and 30 MBF PW

Aspen² = Volume includes approximately 75% aspen, 25% red maple

Total Sale Volume equates to 26.5 tons/ acre or 11.8 cords/ acre

Special Conditions:

1. All pine products cut between April 1 and September 1 must be removed from the sale area within three weeks from time of cutting. Pine products cut during the remainder of the year must be removed prior to April 1 of each year.
2. Seasonal Restrictions (See Zones as designated on the timber sale map):
 - a. Zone A: Harvest Activity Allowed between November 2 and January 14
 - b. Zone B: Harvest Activity Allowed between November 2 and March 14
3. Cutting must be concurrent for all species.
4. Do not cut, knock down or utilize any standing dead trees unless they pose a safety threat to the logger or recreational users.
5. Slash within 50 feet of all roads and trails must be lopped and/or scattered to lie within two feet of the ground and be pulled back 10 feet behind the tree line concurrently with cutting.
6. Whole tree utilization or biomass harvesting is not allowed due to restricted soil types.
7. Follow WI BMP's for water quality at all times. No equipment is allowed within 15 feet of the flowage.
8. Recreational trails must be kept free of debris, snow covered in winter, and left in good condition for vehicle traffic at all times. The trail shall be signed when any logging activities are using the trails.
9. Additional roads and landings must be approved by the timber sale administrator (or designee) in advance of use.

Note: In order to fill and save this form electronically, it must be opened using Adobe Reader or Acrobat software. Save a copy of the file, open Adobe Reader, select File > Open and browse for the file you saved.

State of Wisconsin
Department of Natural Resources
dnr.wi.gov

Timber Sale Bid
Form 2400-049 (R 07/22)

Notice: Completion of this form is mandatory. The Department will not recognize your bid unless you complete and submit this form. Personal information collected will be used for program administration and may be provided to requesters as required by Wisconsin's Public Records law [ss. 19.31-19.39, Wis. Stats.].

Date

Bidder Name

Street Address

City

State

ZIP Code

Property Name (if any)

Northern Highland-American Legion

Timber Sale Name

County O Bridge

Tract Number

15.24

Date and Hour of Bid Opening

May 1, 2024 1:30 pm

Boulder Junction Community Center

Minimum Acceptable Bid (optional)

\$50,400.00

Species-All bids including Lump Sum bids must be by species	Utilization Specifications (4 inch/Whole Tree/Logs)	Estimated Volume	Volume Units (tons/cords/mbf)	Price Bid Per Unit	Total Bid Value on Estimated Volume
red pine	4 inch	1,800	tons		
aspen	4 inch	1,350	tons		

The award shall be based on this TOTAL BID AMOUNT:

Performance Bond

Will be in the form of: (select one)

Personal Check

Assurance Bond

Certified Check/Money Order

Certificate of Deposit

Irrevocable Letter of Credit

Assignment of Savings Account

I understand that any or all bids may be rejected and that consideration and awarding of a contract will be based upon my past performance and ability to complete contracts. **I also understand that if I am the winning bidder, I have 6 weeks from the date of the bid opening to submit an acceptable performance bond. I also understand that if I am awarded the contract and fail to execute it or work under it, I will be required to forfeit to the Department an amount equal to 10% of my total bid amount.** Failure to forfeit the 10% penalty will result in being considered ineligible to bid on any state timber sales for a two-year duration. In the event the highest bidder can not or will not sign the contract, the award may be made to the next highest qualified bid.

By checking this box, I certify that I hold a Wisconsin Master Logger Certification.

Notice: I understand:

Utilization specifications and estimated volumes are listed in the prospectus which is available upon request from the Department.

A copy of the standard timber sales contract which must be entered into is available upon request from the Department.

Signature of Bidder

Bidder's Name (Please Print or Type)

Phone Number (include area code)

Email Address